



CANON SOLUTIONS AMERICA

imageRUNNER  
ADVANCE  
C7580i / C7570i  
C7565i **II**

## imageRUNNER ADVANCE C7500 II Series

Color | High-Volume | Multifunction

Print up to 80/70 ppm (BW/color)

Scan up to 240/220 ipm (300 dpi) (BW/color, duplex)

Print up to 13" × 19"

9,300-sheet maximum paper capacity



Canon's comprehensive portfolio of imageRUNNER ADVANCE multifunction printers and integrated solutions can help **simplify** the end user experience and management of technology; better **control** sensitive information and print-related costs; and help ensure that technology investments proactively **evolve** with changing needs.



### WORKFLOW EFFICIENCY

- 10.1" intuitive touchscreen with smartphone-like usability.
- A unique, customized experience tailored to individual preferences with My ADVANCE.
- Supports mobile solutions and integration with many popular cloud services like Google Drive and Box.<sup>1</sup>
- Scan and convert documents to searchable digital files in a variety of file formats.
- Integration with Canon and various third-party software with embedded application platform.



### SECURITY

- Advanced standard security feature set to help safeguard sensitive information and assist in regulatory compliance.
- Security policy settings can be controlled with a dedicated password, configured from a central location, and exported to other supported devices.
- Control who has access to the device, and to which features, using a host of flexible authentication methods – picture login, PIN code, user name/password, or card access.<sup>2</sup>



### COST MANAGEMENT

- Track and assess print, copy, scan, and fax usage and allocate costs to departments or projects.
- Apply print policies and restrict usage by user to help reduce unnecessary printing and contribute to cost efficiency.
- Standard cloud-based solution provides a centralized dashboard with up-to-the-minute insights into printer activity.<sup>3</sup>
- Upgrade to uniFLOW server or cloud-based solutions for full accounting and reporting for compatible Canon and third-party devices, follow-me printing, job routing, and powerful scan workflows.



## DEVICE AND FLEET MANAGEMENT

- Designed for quick, easy deployment.
- Remote diagnostics and parts life management for proactive maintenance and rapid fixes.
- Easy and intuitive to monitor device status and consumable levels, turn off devices remotely, observe meter readings, manage settings, and implement security policies.
- Common firmware and regular updates with Unified Firmware Platform (UFP) for continuous improvements and consistency across a fleet.




## QUALITY AND RELIABILITY

- Canon's signature reliability and engine technologies help keep productivity high and minimize the impact on support resources.
- Outstanding imaging technologies and toner allow for consistently striking images, using Canon's V<sup>2</sup> color profile.
- Designed to achieve maximum uptime with status notifications to help keep supplies replenished and intuitive maintenance videos for consumables replacement.



## SUSTAINABILITY

- A combination of fusing technologies and low-melting-point toner minimizes power requirements and helps achieve low energy consumption.
- Encourage environmentally-conscious work practices by enabling multiple settings that can help save paper and energy.
- ENERGY STAR® certified and rated EPEAT® Gold.<sup>4</sup>

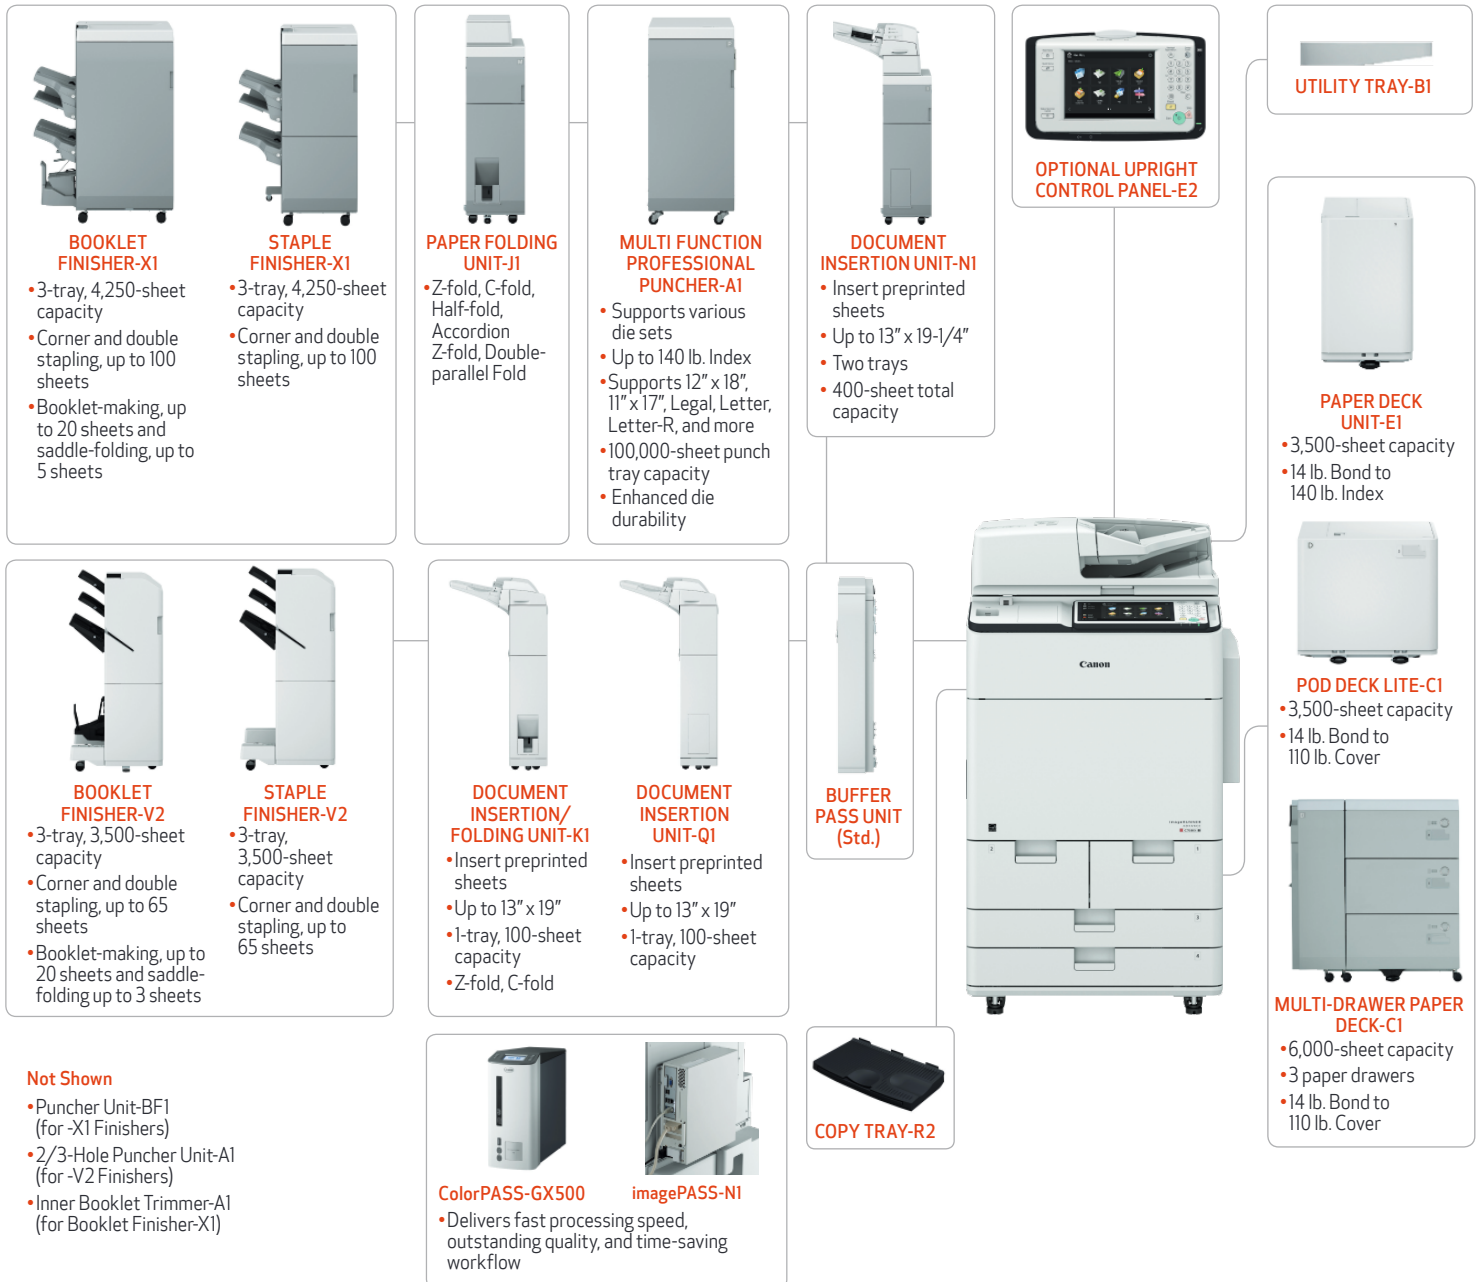

# SPECIFICATIONS

## Main Unit

### Type

Color Laser Multifunctional

### Core Functions

Standard: Print, Copy, Scan, Send, Store  
Optional: Fax

### Processor

Canon Dual Custom Processor (Shared)

### Control Panel

Standard: 10.1" TFT LCD WSVGA Color Touch-panel  
Optional: 10.4" TFT LCD WSVGA Color Upright-panel

### Memory

4.0 GB RAM

### Hard Disk Drive

Standard: 250 GB/Maximum: 1 TB

### Print Resolution

2400 dpi x 2400 dpi

### Interface Connection

#### Network

Standard: 1000Base-T/100Base-TX/10Base-T,  
Wireless LAN (IEEE 802.11 b/g/n)  
Optional: NFC, Bluetooth

#### Others

Standard: USB 2.0 x2 (Host), USB 3.0 x1 (Host),  
USB 2.0 x1 (Device)  
Optional: Serial Interface, Copy Control Interface

### Paper Capacity (LTR, 20 lb. Bond)

Standard: 3,550 Sheets  
Maximum: 9,300 Sheets

### Paper Sources (LTR, 20 lb. Bond)

Standard: Two 1,100-sheet Paper Drawers,  
Two 550-sheet Paper Cassettes,  
250-sheet Stack Bypass  
Optional: 3,500-sheet Paper Deck (Paper Deck  
Unit-E1), 3,500-sheet Paper Deck (POD Deck  
Lite-C1), 6,000-sheet Paper Deck (Multi-  
Drawer Paper Deck-C1)  
Maximum: 9,300 Sheets (With Multi-Drawer Paper  
Deck-C1)

### Paper Output Capacity (LTR, 20 lb. Bond)

250 Sheets (with Copy Tray-R2)  
3,500 Sheets (with External Finisher-V2)  
4,250 Sheets (with External Finisher-X1)

### Finishing Capabilities

Standard: Collate, Group  
With Finishers: Collate, Group, Offset, Staple, Booklet,  
Hole Punch, Staple-Free Staple, Staple  
On Demand, Document Insertion, Z-Fold,  
Accordion Z-Fold, C-Fold, Half-Fold, Double  
Parallel Fold, Trimming

### Supported Media Types

Paper Drawers (1/2): Thin, Plain, Recycled, Color, Heavy,  
Pre-punched, Letterhead, Bond,  
Transparency  
Paper (3/4): Thin, Plain, Recycled, Color, Heavy,  
Cassettes Pre-punched, Letterhead, Bond,  
Transparency, Tab, Envelope  
Stack Bypass: Thin, Plain, Recycled, Color, Heavy,  
Pre-punched, Labels, Letterhead,  
Bond, Coated, Transparency, Tab,  
Tracing, Envelope, Textured

### Supported Media Sizes

Paper Drawers (1/2): Letter  
Paper 13" x 19", 12" x 18", 11" x 17", Legal, Letter,  
Cassettes Letter-R, Executive, Statement-R, Envelope  
(3/4): [No.10 (COM10), Monarch,  
DL, ISO-C5], Custom Size (5-1/2" x 7-1/8" to  
13" x 19-1/4"), Envelope Custom Size (3-1/8" x  
5-7/8" to 13" x 19-1/4")  
Stack Bypass: 13" x 19", 12" x 18", 11" x 17", Legal, Letter,  
Letter-R, Executive, Statement-R, Envelope  
[No.10 (COM10), Monarch, DL, ISO-C5],  
Custom Size (4" x 5-7/8" to  
13" x 19-1/4"), Envelope Custom Size  
(3-1/2" x 5-7/8" to 13" x 19-1/4"),  
Free Size (4" x 7-1/8" to 13" x 19-1/4")

### Supported Media Weights

Paper Drawers: 14 lb. Bond to 80 lb. Cover (52 to 220 g/m<sup>2</sup>)  
Paper Cassettes: 14 lb. Bond to 140 lb. Index (52 to 256 g/m<sup>2</sup>)  
Stack Bypass: 14 lb. Bond to 110 lb. Cover (52 to 300 g/m<sup>2</sup>)  
Duplexing: 14 lb. Bond to 80 lb. Cover (52 to 220 g/m<sup>2</sup>)

### Print/Copy Speed (BW/Color)

C7580i II: Up to 80/70 ppm (Letter); Up to 60/52 ppm  
(Letter-R); Up to 47/41 ppm (Legal);  
Up to 40/35 ppm (11" x 17")  
C7570i II: Up to 70/65 ppm (Letter); Up to 52/48 ppm  
(Letter-R); Up to 41/38 ppm (Legal);  
Up to 35/32 ppm (11" x 17")  
C7565i II: Up to 65/60 ppm (Letter); Up to 48/45 ppm  
(Letter-R); Up to 38/35 ppm (Legal);  
Up to 32/30 ppm (11" x 17")

### Warm-up Time

From Power On: 30 Seconds or Less  
Quick Startup  
Mode: 4 Seconds<sup>5</sup>

### Dimensions (W x D x H)

27-1/8" x 37-1/8" x 48" (689 mm x 941 mm x 1220 mm)

### Installation Space (W x D)

Basic [With Booklet Finisher-V2 (Stack Bypass and Cassette  
Drawers Open)]:  
75-3/8" x 60" (1913 mm x 1524 mm)  
Fully Configured [With Multi-Drawer Paper  
Deck-C1+Document Insertion Unit-N1+Multi Function  
Professional Puncher-A1 + Paper Folding Unit-J1 + Booklet  
Finisher-X1 (Cassette Drawers Open)]:  
150-3/8" x 60" (3818 mm x 1524 mm)

### Weight

Approx. 595.2 lb. (270 kg)<sup>6</sup>

## Print Specifications

### Data Processing Resolution (dpi)

Up to 1200 x 1200

### Standard Page Description Languages

UFR II, PCL<sup>6</sup>, Adobe<sup>®</sup> PS<sup>®</sup> 3

### Direct Print

Available from USB, Advanced Box, Remote UI,  
and Web Access<sup>7</sup>

### Supported File Types for Direct Print

PDF, TIFF, JPEG, EPS,<sup>8</sup> XPS

### Printing from Mobile Devices and Cloud-based Services

A range of software and MEAP-based solutions are available  
to provide printing from mobile devices or Internet-  
connected devices and cloud-based services depending on  
your requirements.

### Fonts

PCL Fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts,  
Andalé Mono WT J/K/S/T (Japanese,  
Korean, Simplified and Traditional Chinese),<sup>9</sup>  
Barcode Fonts<sup>10</sup>  
PS Fonts: 136 Roman

### Operating System<sup>11</sup>

UFR II: Windows Vista<sup>®</sup>/Server 2008/Windows<sup>®</sup> 7/  
Server 2008 R2/Server 2012/Windows 8.1/  
Server 2012 R2/Windows 10/Server 2016,  
MAC OS X (10.7 or later)  
PCL: Windows Vista/Server 2008/Windows 7/  
Server 2008 R2/Server 2012/Windows 8.1/  
Server 2012 R2/Windows 10/Server 2016  
PS: Windows Vista/Server 2008/Windows 7/  
Server 2008 R2/Server 2012/Windows 8.1/  
Server 2012 R2/Windows 10/Server 2016,  
MAC OS X (10.7 or later)

## Copy Specifications

### First-Copy-Out Time (Letter)

C7580i II: As fast as 4.4 seconds (BW)/  
5.4 seconds (Color)  
C7570i II: As fast as 4.8 seconds (BW)/  
5.9 seconds (Color)  
C7565i II: As fast as 4.8 seconds (BW)/  
5.9 seconds (Color)

### Copy Resolution (dpi)

Reading: Up to 600 x 600  
Printing: 2400 x 2400

### Multiple Copies

Up to 9,999

### Magnification

25%-400% (1% Increments)

### Preset Reductions

25%, 50%, 64%, 73%, 78%

### Preset Enlargements

121%, 129%, 200%, 400%

### Basic Copy Features

Preset Reduction/Enlargement Ratios by Area, Paper  
Setting, Previous Settings, Favorite Settings, Finishing, Two-  
sided, Density Adjustment, Original Type Selection, Interrupt  
Mode, Setting Confirmation/Cancel

### Special Copy Features

Book to Two Pages, Two-sided Original, Finishing, Booklet,  
Job Build, N on 1, Add Cover, Insert Sheets, Different-size  
Originals, Density Adjustment, Original Type Selection,  
Transparency Cover Sheets, Page Numbering, Copy Set  
Numbering, Sharpness, Erase Frame, Secure Watermark,  
Print Date, Shift, Gutter, Print & Check, Negative/Positive,  
Repeat Images, Merge Job Blocks, Job Done Notice, Mirror  
Image, Print on Tab, Store in Mail Box, Superimpose Image,  
Copy ID Card, Detect Feeder Multi Sheet Feed, Free Size  
Original, Color Balance, Adjust One-Touch Color, Area  
Designation

## Scan Specifications

### Type

Color Platen and Single-pass Duplexing Automatic  
Document Feeder

### Document Feeder Paper Capacity

300 Sheets (20 lb. Bond)

### Document Feeder Supported Media Sizes

11" x 17", Legal, Letter, Letter-R, Statement, Statement-R

### Document Feeder Supported Media Weights

BW Original: 13 lb. Bond to 80 lb. Cover  
(50 to 220 g/m<sup>2</sup>)  
Color Original: 17 lb. Bond to 80 lb. Cover  
(64 to 220 g/m<sup>2</sup>)

### Platen Acceptable Originals

Sheet, Book, 3-Dimensional Objects [Up to 4.4 lb. (2 kg)]

### Pull Scan

Color Network ScanGear2 for both Twain and WIA  
Supported OS: Windows Vista/7/8.1/10  
Server 2008/Server 2008 R2/Server 2012/  
Server 2012 R2/Server 2016

### Scan to Mobile Devices and Cloud-based Services

A range of solutions is available to provide scanning to  
mobile devices and cloud-based services depending on  
your requirements.

### Scan Speed (Letter) (300 dpi/600 dpi)

Single-sided Scanning (BW): 120 ipm/120 ipm  
Single-sided Scanning (Color): 120 ipm/70 ipm  
Double-sided Scanning (BW): 240 ipm/150 ipm  
Double-sided Scanning (Color): 220 ipm/90 ipm

## Send Specifications

### Destination

E-mail/Internet Fax (SMTP), SMB, FTP, WebDAV, Mail Box,  
Super G3 Fax (Optional), IP Fax (Optional)

### Address Book

LDAP (2,000)/Local (1,600)/Speed dial (200)

### Send Resolution (dpi)

600 x 600, 400 x 400, 300 x 300, 200 x 400, 200 x 200,  
200 x 100, 150 x 150, 100 x 100

### Communication Protocol

File: FTP, SMBv3.0, WebDAV  
E-mail/I-Fax: SMTP, POP3, I-Fax (Simple, Full)

### File Format

Standard: TIFF, JPEG, PDF (Encrypted, Compact,  
Searchable, Apply Policy, Optimize for Web,  
PDF A/1-b), XPS (Compact, Searchable),  
Office Open XML (PowerPoint<sup>®</sup>, Word),  
Encrypted PDF, Digital Signature (PDF/XPS)  
Optional: PDF (Trace & Smooth)

## Universal Send Features

Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density Adjustment, Sharpness, Copy Ratio, Erase Frame, Job Build, Direct Send, Delayed Send, Preview, Finished Stamp, Job Done Notice, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation, Skip Blank Originals, Detect Feeder Multi Sheet Feed

## Fax Specifications

### Maximum Number of Connection Lines

4

### Modem Speed

Super G3: 33.6 Kbps  
G3: 14.4 Kbps

### Compression Method

MH, MR, MMR, JBIG

### Resolution (dpi)

400 x 400, 200 x 400, 200 x 200, 200 x 100

### Sending/Recording Size

Statement-R to 11" x 17"

### Fax Memory

Up to 30,000 pages

### Speed Dials

Max. 200

### Group Dials/Destinations

Max. 199 dials

### Sequential Broadcast

Max. 256 addresses

### Memory Backup

Yes

### Fax Features

Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density for Scanning, Sharpness, Copy Ratio, Erase Frame, Job Build, Specifying the Sender's Name (when sending fax), Sender's Name (TTI), Select Line, Selecting the Telephone Line (when sending fax), Direct Send, Delayed Send, Preview, Finished Stamp, Job Done Notice, TX Report, Detect Feeder Multi Sheet Feed

## Store Specifications

### Mail Box (Number Supported)

100 User In-boxes, 1 Memory RX In-box, 50 Confidential Fax In-boxes, 30,000 Maximum Pages Stored

### Advanced Box

Communication Protocol: SMB or WebDAV Supported

Client PC: Windows (Windows Vista/7/8/8.1/10)

### Concurrent Connections (Max.)

SMB: 64  
WebDAV: 3 (Active Sessions)

### Advanced Box Available Disk Space

Approx. 16 GB (Standard HDD)/Approx. 480 GB (1 TB HDD)

### Advanced Box Features

Disabling Advanced Box, Storage Filtering, Authentication for Advanced Box Log-in, Search Function, Sort Function, Printing a PDF File with a Password, imageWARE Secure Audit Manager Support

### Memory Media

Standard: USB

## Security Specifications

### Authentication

Standard: Universal Login Manager, Cloud Authentication,<sup>12,13</sup> User Authentication, Department ID Authentication, Access Management System, Device and Function Level Log-in  
Optional: uniFLOW

### Data

Standard: Trusted Platform Module (TPM), Hard Disk Password Lock, Hard Disk Drive Erase, Mail Box Password Protection, Hard Disk Drive Encryption (FIPS140-2 Validated)  
Optional: Hard Disk Drive Mirroring, Hard Disk Drive Removal, IEEE 2600.2 Common Criteria Certification, Data Loss Prevention (Requires uniFLOW)

### Network

Standard: Encrypted Secure Print, IP/Mac Address Filtering, IPsec, TLS Encrypted Communication, SNMP V3.0, IEEE 802.1X, IPv6, SMTP Authentication, POP Authentication before SMTP

### Document

Standard: Secure Watermark, Secure Print, Forced Hold Printing, Adobe LiveCycle® Rights Management ES2.5 Integration, Encrypted PDF, Encrypted Secure Print, Device Signature,  
Optional: User Signature, Document Scan Locking

## Environmental Specifications

### Power Requirements

C7580i II: 208 V AC, 60 Hz, 12 A  
C7570i II/C7565i II: 120-127 V AC, 60 Hz, 16 A

### Plug (Main Unit)

C7580i II: NEMA 6-15P  
C7570i II/C7565i II: NEMA 5-20P

### Power Consumption

Maximum  
C7580i II: Approx. 2.5 kWh  
C7570i II/C7565i II: Approx. 2.0 kWh  
Standby: Approx. 119.2 W  
Sleep Mode: Approx. 0.9 W<sup>14</sup>  
Typical Electricity Consumption (TEC) Rating  
C7580i II: 5.5 kWh  
C7570i II: 4.6 kWh  
C7565i II: 4.5 kWh

### Standards

ENERGY STAR® Certified  
Rated EPEAT® Gold<sup>4</sup>  
RoHS Compliant

## Consumables

### Toner

GPR-56 Toner

### Toner Yield (Estimated @ 5% Coverage)

Black: 82,000 Images  
Color (C,M,Y): 66,500 Images

<sup>1</sup> Subscription to a third-party cloud service required. Subject to third-party cloud service providers' terms and conditions.

<sup>2</sup> Requires additional option.

<sup>3</sup> Available 2Q 2018.

<sup>4</sup> For current EPEAT rating (Gold/Silver/Bronze), please visit [www.epeat.net](http://www.epeat.net).

<sup>5</sup> Time from device power-on to when copy jobs can be programmed.

<sup>6</sup> Includes main unit, ADF, and consumables.

<sup>7</sup> PDF print from Web sites is supported.

<sup>8</sup> EPS can be printed directly only from the Remote User Interface.

<sup>9</sup> Requires the optional PCL International Font Set-A1.

<sup>10</sup> Requires the optional Barcode Printer Kit-D1.

<sup>11</sup> Other operating systems and environments including AS/400, UNIX, Linux and Citrix may be supported. Some of these solutions are chargeable. SAP Device Types are available via the SAP Market Place. For more information, contact your sales representative.

<sup>12</sup> No charge for this solution; however activation is required.

<sup>13</sup> Check for availability.

<sup>14</sup> 0.9 W Sleep mode is not available in all circumstances due to certain settings.

For detailed specifications and a comprehensive list of optional accessories, see the imageRUNNER ADVANCE C7500 Series Specifications document.

For more information, call or visit  
1.800.815.4000 CSA.CANON.COM



As an ENERGY STAR® Partner, Canon U.S.A., Inc. has certified these models as meeting the ENERGY STAR energy efficiency criteria through an EPA recognized certification body. ENERGY STAR and the ENERGY STAR mark are registered U.S. marks. AirPrint and the AirPrint logo are trademarks of Apple Inc. Canon, imageRUNNER, imageWARE, imagePASS, and the GENUINE logo are registered trademarks or trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. It indicates that this model has been upgraded to new system software and includes additional security features as standard. Canon products offer certain security features, yet many variables can impact the security of your devices and data. Canon does not warrant that use of its features will prevent security issues. Nothing herein should be construed as legal or regulatory advice concerning applicable laws; customers must have their own qualified counsel determine the feasibility of a solution as it relates to regulatory and statutory compliance. All other referenced product names and marks are trademarks of their respective owners. All printer output images are simulated. All features presented in this brochure may not apply to all Series and/or products and may be optional; please check with your Canon Authorized Dealer for details. Products shown with optional accessories. Canon U.S.A. does not provide legal counsel or regulatory compliance consultancy, including without limitation, Sarbanes-Oxley, HIPAA, GLBA, Check 21 or the USA Patriot Act. Each customer must have its own qualified counsel determine the advisability of a particular solution as it relates to regulatory and statutory compliance. Specifications and availability subject to change without notice. Not responsible for typographical errors.  
©2018 Canon U.S.A., Inc. All rights reserved.

Federal Law prohibits copying of certain documents. Violators may be subject to penalties. We suggest that you check with your own legal counsel. Canon U.S.A., Inc. and Canon Canada, Inc. intend to cooperate with Law Enforcement Agencies in connection with claims of unauthorized copying.



CSA/18-053  
0218-CSAIRAC7500IISRB-PDF-IH

**Canon**  
CANON SOLUTIONS AMERICA

**UFP** UNIFIED FIRMWARE PLATFORM



**CANON GENUINE**  
TONER, CARTRIDGE & PARTS

